



AD-330

MAXIMUM CAPACITY (DRY WEIGHT) PER POCKET		30 lb	13.60 kg
TUMBLER DIAMETER		27-1/4"	69.2 cm
TUMBLER DEPTH		30"	76.2 cm
TUMBLER VOLUME PER POCKET		10.1 cu ft	286.0 L
TUMBLER/DRIVE MOTOR PER POCKET		1/3 hp	0.25 kW
BLOWER/FAN MOTOR PER POCKET		N/A	
DOOR OPENING (DIAMETER)		21-1/2"	54.6 cm
DOOR SILL HEIGHT TOP POCKET / BOTTOM POCKET		50-15/16" / 12-3/16"	129.4 cm / 31 cm
WATER CONNECTION		3/4"-11.5 NH (North America)	
		3/4" B.S.P.T. (Outside North America)	
DRYERS PER 20'/40' CONTAINER		14 / 28	
DRYERS PER 48'/53' TRUCK		34 / 36	
Gas	VOLTAGE AVAILABLE		100-240V 1Ø 2w 50/60 Hz
	APPROXIMATE NET WEIGHT		793 lb 359.7 kg
	APPROXIMATE SHIPPING WEIGHT		860 lb 390.1 kg
	AIRFLOW PER POCKET	60 Hz	400 cfm 11.33 cmm
		50 Hz	333 cfm 9.44 cmm
	HEAT INPUT PER POCKET		68,000 Btu/hr 17,135 kcal/hr
	EXHAUST CONNECTION (DIAMETER) PER POCKET		6" 15.24 cm
	COMPRESSED AIR CONNECTION		N/A
	COMPRESSED AIR VOLUME		N/A
	INLET PIPE CONNECTION PER POCKET		1/2" F.N.P.T.
Electric			1/2" B.S.P.T. (CE and Australia Only)
	VOLTAGE AVAILABLE		208-416V 1,3Ø 2,3,4w 50/60 Hz
	APPROXIMATE NET WEIGHT		793 lb 359.7 kg
	APPROXIMATE SHIPPING WEIGHT		860 lb 390.1 kg
	AIRFLOW PER POCKET	60 Hz	400 cfm 11.33 cmm
		50 Hz	333 cfm 9.44 cmm
	EXHAUST CONNECTION (DIAMETER) PER POCKET		6" 15.24 cm
	COMPRESSED AIR CONNECTION		N/A
	COMPRESSED AIR VOLUME		N/A
	OVEN SIZE PER POCKET		
Steam*			
	VOLTAGE AVAILABLE		100-240V 1Ø 2w 50/60 Hz
	APPROXIMATE NET WEIGHT		837 lb 379.7 kg
	APPROXIMATE SHIPPING WEIGHT		884 lb 401.0 kg
	AIRFLOW PER POCKET	60 Hz	400 cfm 11.33 cmm
		50 Hz	333 cfm 9.44 cmm
	STEAM CONSUMPTION PER POCKET		101 lb/hr 45.8 kg/hr
	OPERATING STEAM PRESSURE		125 psi max 8.6 bar
	EXHAUST CONNECTION (DIAMETER) PER POCKET		6" 15.24 cm
	COMPRESSED AIR CONNECTION PER POCKET		1/8" F.N.P.T.
	COMPRESSED AIR VOLUME		0.5 cfh 0.014 cmh
	BOILER HORSEPOWER (NORMAL LOAD) PER POCKET		2.9 Bhp
	SUPPLY CONNECTION PER POCKET		1" F.N.P.T.
	RETURN CONNECTION PER POCKET		3/4" F.N.P.T.

Shaded areas are stated in metric equivalents

12/11/03

* Dryer must be provided with clean, dry and regulated 80 psi +/- 10 psi (5.51 bar +/- 0.69 bar) air supply.



AD-330

DRYER NOTES:

- DUCTWORK SIZE VARIES WITH INSTALLATION CONDITIONS.
- EXHAUST STATIC PRESSURE MUST BE NO LESS THAN 0 AND MUST NOT EXCEED 0.3" (0.74 MBI) WATER COLUMN.
- UPPER POCKET OPTIONAL TOP OR REAR EXHAUST.

STEAM DRYER NOTES:

- SIZE OF PIPING TO DRYER VARIES WITH INSTALLATION CONDITIONS. CONTACT FACTORY FOR ASSISTANCE.
- STEAM DRYERS MUST BE PROVIDED WITH CLEAN, DRY, REGULATED 80 PSI $\pm$ 10 PSI (5.5 BAR $\pm$ 0.69 BAR) AIR SUPPLY.
- REAR EXHAUST STANDARD.

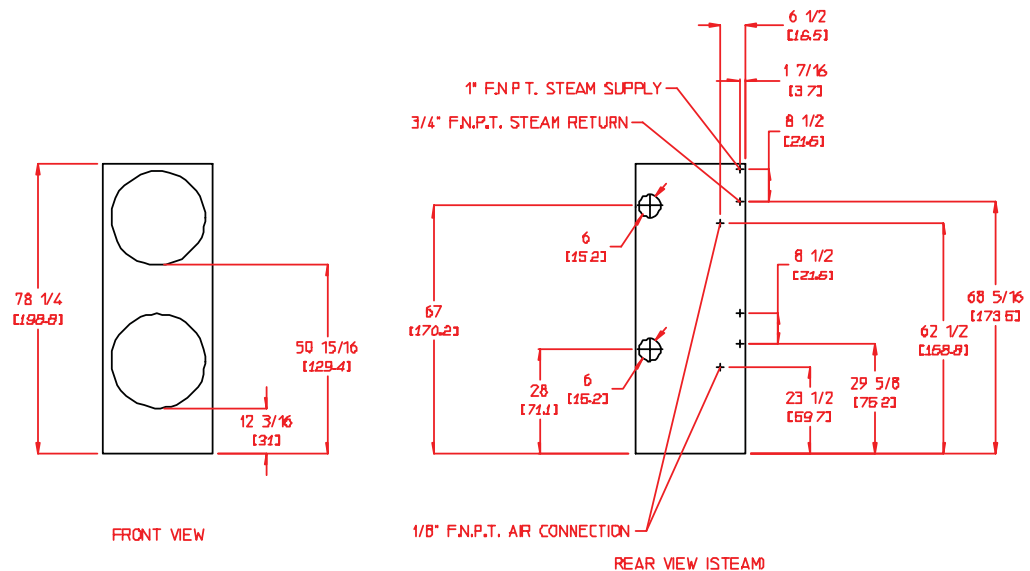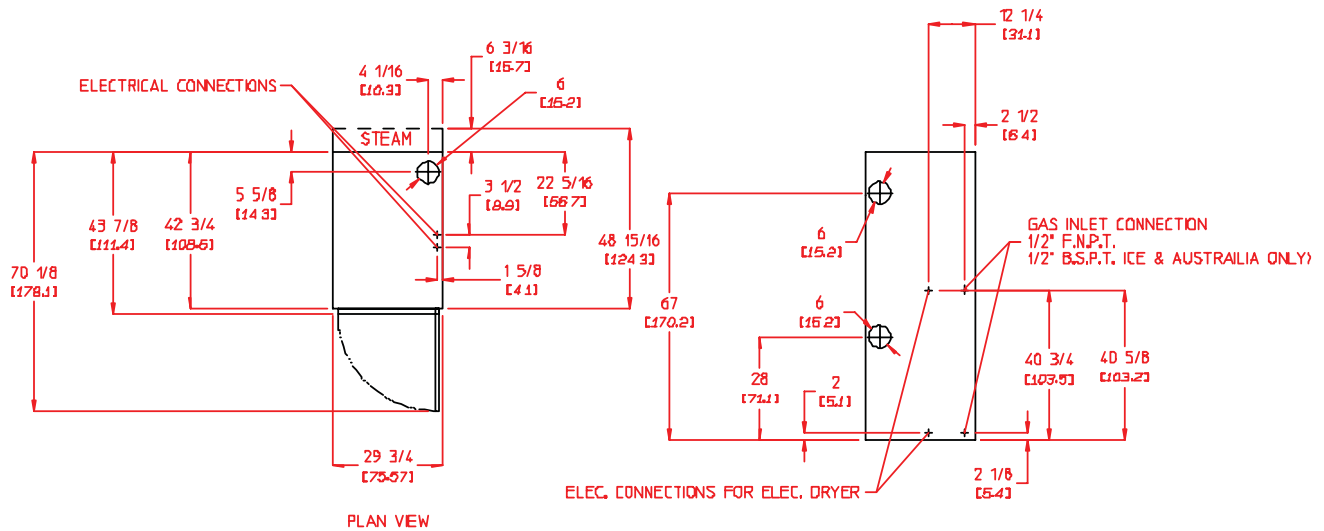

6/17/04



88 Currant Road • Fall River, MA 02720
Tel. 508-678-9000 • Fax 508-678-9447
sales@amdry.com • www.amdry.com