


IC43316 (1650 mm/65')

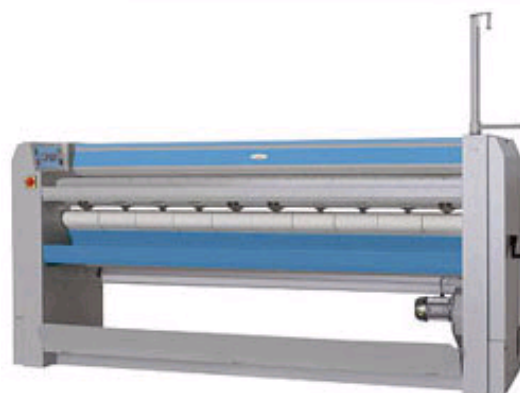

IC43316
(1650 mm/65')

Easy to use control panel

Ergonomic working height

Finger guard protection

Provides additional safety for operators.

Durable ironing belts of Nomex withstand temperatures above 200°C

Return feed, can be installed close to a wall for maximum space utilisation (LF model)

Pressure roll with a Nomex® padding for a good ironing quality

Durable ironing belts made of Nomex® which can withstand temperatures above 200°C

Stainless steel cylinder prevents rust and improves lifetime

Gas heated ironers using the maintenance free ceramic gas burner technology

Return feed, can be installed close to a wall for space saving

Rolls diameter, mm/in:	325 / 12' 13/16"
Ironing width, mm/in:	1650 / 65'
Dimensions (widthxdepthxheight mm):	2030x690x1145
Speed range, m/min:	0.5 to 5.5

Foldable feeding tray so that large flats avoid touching the ground

Options

Electronic control panel with automatic speed regulation system (DIAMMS*) – compatible with the RABC** process for the traceability of ironing parameters; flashing light showing to the operator that an item is not processed according to the standard

CMIS*** connection for an automatic recording of the ironing parameters

Nickel-plated cylinder for better production on cotton items

Manual folding arm for easy folding of large flat items by only one operator

Payment system version with a clutch to control the feeding belts, for installation in apartment house laundries or self service laundries

Electrolux Professional North America, 3225 SW 42nd Street, Fort Lauderdale, Florida 33312 - Toll free: 866.449.4200