


WASCOMAT FLATWORK IRONERS

IC3316, IC3320

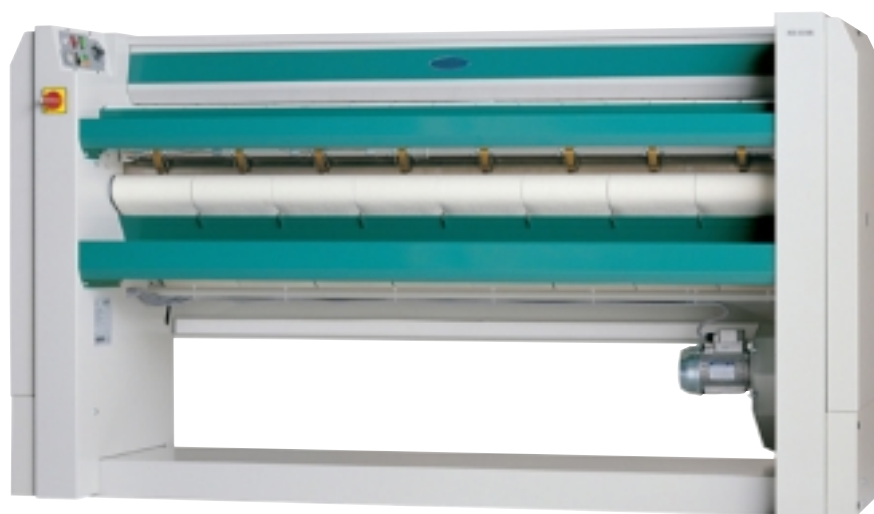


Features and benefits

- Durable ironing belts of Nomex withstand temperatures above 200°C/392°F.
- Return feed: can be installed close to a wall for space saving.
- Finger guard protection.
- Can function as a dryer/ironer.
- Patented ceramic burner for increased energy savings.
- Stainless steel cylinder.
- Available in gas only.


Main specifications		IC3316	IC3320
Capacity*, max. water evaporation	l/h/gal/h	19.5/5.2	24.5/6.5
Roller,			
diameter	ø mm/in	325/12 ¹³ / ₁₆	325/12 ¹³ / ₁₆
length	mm/in	1650/64 ¹⁵ / ₁₆	2065/81 ⁵ / ₁₆
Ironing speed**	m/min/in/min	0.5-5.5/19 ¹¹ / ₁₆ -216 ⁹ / ₁₆	0.5-5.5/19 ¹¹ / ₁₆ -216 ⁹ / ₁₆
Heating,			
gas	Btu/h (kW)	68240 (20)	85330 (25)
* 50% residual moisture content cotton 180 g/m ² and 100% roller utilization (ISO 9398).			
** Other speed range available on request.			

Electrical connections*			IC3316	IC3320
Heating Voltage				
Gas	230V 3 AC 60 Hz	kW (A)	0.5 (12)	0.5 (12)
	380-415V 3 AC 60 Hz	kW (A)	0.5 (12)	0.5 (12)
Gas and exhaust connections				
Exhaust, outlet air	ø mm/in m³/h/cfm		125/4 ¹⁵ / ₁₆ 426/251	125/4 ¹⁵ / ₁₆ 515/303
Sound levels				
Airborne sound level		dB(A)	65	65
Heat emission				
% of installed power, max			2	2
Shipping data				
Shipping volume	net, kg/lb		300/661	330/727
	crated, kg/lb		445/981	480/1058
	boxed, kg/lb		475/1047	520/1146
	m³/cu yds		2.7/3.5	3.2/4.2
Dimensions in mm/in				
A Width			2030/79 ¹⁵ / ₁₆	2445/96 ¹ / ₄
B Depth			680/26 ³ / ₄	680/26 ³ / ₄
C Height			1145/45 ¹ / ₁₆	1145/45 ¹ / ₁₆
1 Control panel 2 Electrical connection 3 Steam & burnt gas exhaust 4 Main switch				

* Other voltages available.

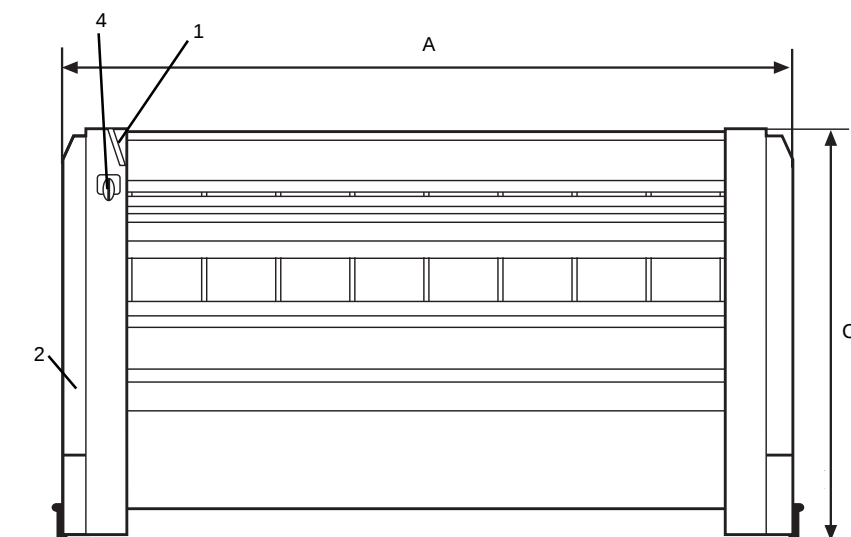

Front

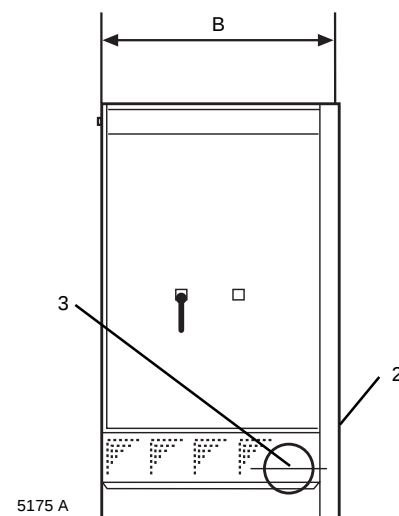

Right side

Wascomat
www.wascomat.com

1-800-645-2204

461 Doughty Blvd., Inwood, L.I., N.Y. 11096-0338 • Telephone: 516-371-4400.
Sales and Administration FAX (US and Canada): 516-371-4204 • e-mail: sales@wascomat.com
Parts and Service FAX (US and Canada): 516-371-4029 • e-mail: parts@wascomat.com
En Mexico: Llame gratis a este numero 010-800-010-1010

We reserve the right to alter specifications without notice.