

DC 2-5 TON PACKAGED**Construction Features**

- Environmentally Friendly R-410A
- Low profile design
- Top Discharge Condenser Exhaust
- Easy Access Electrical Panel
- Insulated Copper Piping
- Stainless Steel Heat Exchanger
- Compressor Crankcase Heater
- G-90 Galvanized Cabinet
- All Weather-Tight Components
- Non-Corroding Insulated Water Tank
- Water Level Viewing Ports
- Water Tank Capacity of 40 Gallons
- Stainless Steel Pump with Ball Valve
- 24 Volt Digital Temperature Control Module with On/Off Switch

Options For Custom Designs & Modifications

- Hot Gas By-Pass
- Low Pressure By-Pass
- Flooded Condenser With Receiver & Accumulator
- Evaporator Heat Tape Freeze Protection
- High Pressure Pump
- Second Pump Connection

Safety Features


- ETL Listed
- Low Ambient Fan Cycling
- Low Pressure Refrigeration Control
- High Pressure Refrigeration Control
- Low Water Flow Safety Shut-Off
- Short Cycling Time Delay
- Temperature Sensor Failure Protection
- Water Inline Strainer

ELECTRICAL SPECIFICATIONS: DC 2-5 TON PACKAGED


P/N	MODELS	TONS	VOLTS	HERTZ	PH	MIN CIRCUIT AMP	MAX FUSE	COMPRESSOR RLA	LRA	PUMP HP
004837	WCDCP221	2	208/230	60	1	33.9	40	14.7	72.5	1
004286	WCDCP223	2	208/230	60	3	28.5	40	10.40	63	1
004790	WCDCP243	2	460	60	3	11.2	15	4.5	31	1
004832	WCDCP321	3	208/230	60	1	37.9	50	17.9	112	1
004833	WCDCP323	3	208/230	60	3	32.4	45	13.5	88	1
004791	WCDCP343	3	460	60	3	13.6	20	6.4	39	1
004834	WCDCP421	4	208/230	60	1	48.5	60	26.4	134	1
004723	WCDCP423	4	208/230	60	3	37.8	50	16.0	110	1
004792	WCDCP443	4	460	60	3	15.40	20	7.8	52	1
002441	WCDCP521	5	208/230	60	1	49.5	60	27.2	150	1
004835	WCDCP523	5	208/230	60	3	39.3	50	19	123	1
004793	WCDCP543	5	460	60	3	17.7	25	9.7	62	1

Specifications subject to change without notice.

DIMENSIONS: DC 2-5 Ton Packaged

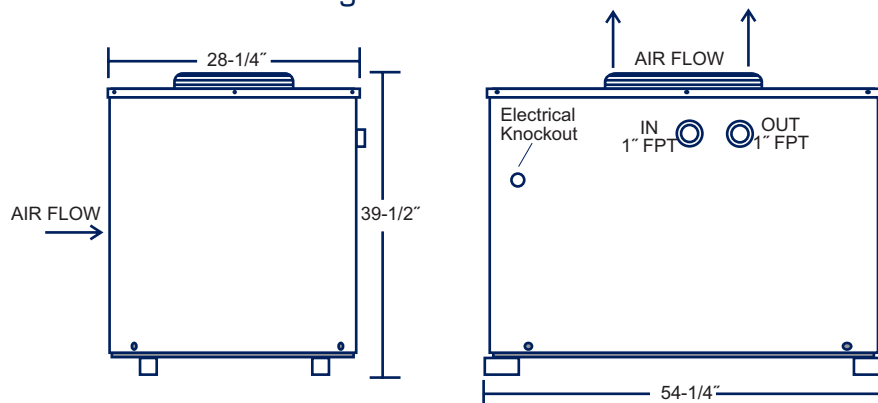

FLOW DIAGRAM: DC 2-5 Ton Packaged Chiller With OPTIONAL EXTERNAL Process Pump

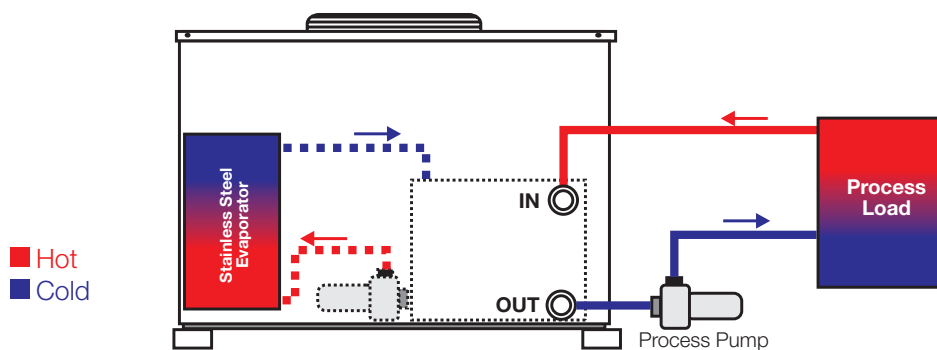

DC 2-5 TON PACKAGED

1