

TS 3-5 TON PACKAGED**Construction Features**

Environmentally Friendly R-410A
Top Discharge Condenser Exhaust
Easy Access Electrical Panel
Stainless Steel Heat Exchanger
Compressor Crankcase Heater
G-90 Galvanized Cabinet
All Weather-Tight Components
Non-Corroding Insulated Water Tank
Water Level Viewing Ports
Water Tank Capacity of 30 Gallons
Stainless Steel Pump with Ball Valve
24 Volt Digital Temperature Control Module
with On/Off Switch

Safety Features

Low Ambient Fan Cycling
Low Pressure Refrigeration Control
High Pressure Refrigeration Control
Low Water Flow Safety Shut-Off
Short Cycling Time Delay
Temperature Sensor Failure Protection
Water Inline Strainer

**Options for Custom
Designs & Modifications**


Low Pressure By-Pass
High Pressure Pump

ELECTRICAL SPECIFICATIONS: TS 3-5 TON PACKAGED


P/N	MODELS	TONS	VOLTS	HERTZ	PH	MIN CIRCUIT AMP	MAX FUSE	COMPRESSOR		PUMP HP
004836	WCTSP321	3	208/230	60	1	33.70	40	RLA	LRA	1
002317	WCTSP323	3	208/230	60	3	23.80	30	11.5	77	1
003832	WCTSP343	3	460	60	3	9.1	15	5.1	35	1
003278	WCTSP521	5	208/230	60	1	40.8	60	26.2	134	1
002162	WCTSP523	5	208/230	60	3	27.5	40	16.9	111	1
002642	WCTSP543	5	460	60	3	13.6	20	8.7	53	1

Specifications subject to change without notice.

DIMENSIONS: TS 3-5 Ton Packaged

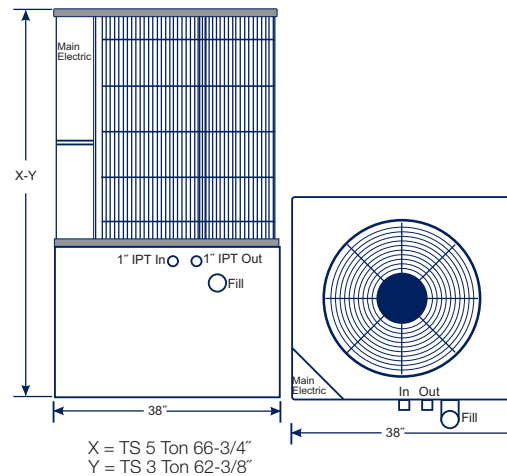

FLOW DIAGRAM: TS 3-5 Ton Packaged

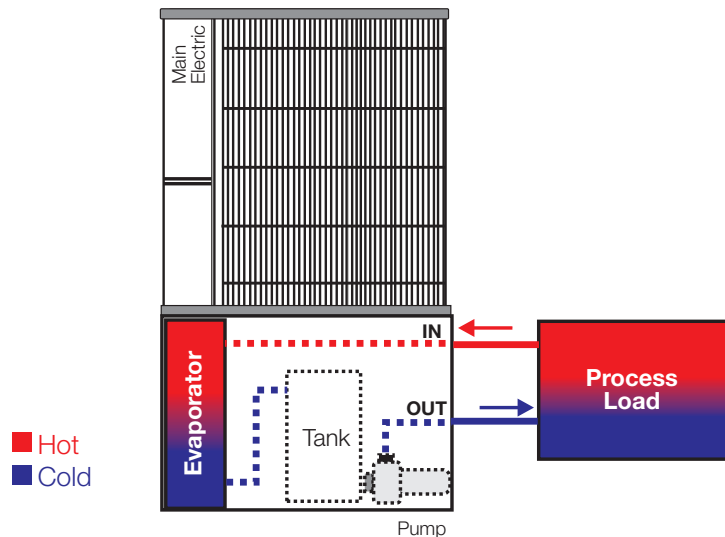

TS 3-5 TON PACKAGED