



AD-236

MAXIMUM CAPACITY (TOTAL DRY WEIGHT)*		60 lbs	27.2 kg
TUMBLER DIAMETER		27-1/4"	69.22 cm
TUMBLER DEPTH		30"	76.2 cm
TUMBLER VOLUME (PER TUMBLER)		10.1 cu ft	0.286 cu m
TUMBLER MOTOR (PER TUMBLER)		1/2 hp	0.373 kW
DOOR OPENING DIAMETER (PER TUMBLER)		21-1/2"	54.61 cm
EXHAUST CONNECTION (DIAMETER)		8"	20.32 cm
DRYERS PER 20'/40' CONTAINER		11 / 23	
DRYERS PER 48'/53' TRUCK		28 / 30	
Gas	VOLTAGE AVAILABLE	120-240v 1Ø,3Ø 2, 3w 50/60 Hz	
	APPROX. NET WEIGHT	850 lbs	385.5 kg
	APPROX. SHIPPING WEIGHT	900 lbs	408.2 kg
	HEAT INPUT (TOTAL FOR BOTH TUMBLERS)	160,000 Btu/hr	40,320 kcal/hr
	AIRFLOW (PER TUMBLER)	400 cfm	11.3 cmm
	INLET PIPE CONNECTION	3/4" M.N.P.T.	

Shaded areas are stated in metric equivalents



EV 5/21/04

* 30 lbs each per pocket/tumbler.

AD-236

DRYER NOTES:

- ° DUCTWORK SIZE VARIES WITH INSTALLATION CONDITIONS.
- ° EXHAUST STATIC PRESSURE MUST BE NO LESS THAN 0 AND MUST NOT EXCEED 0.3" (0.74 MB) WATER COLUMN.

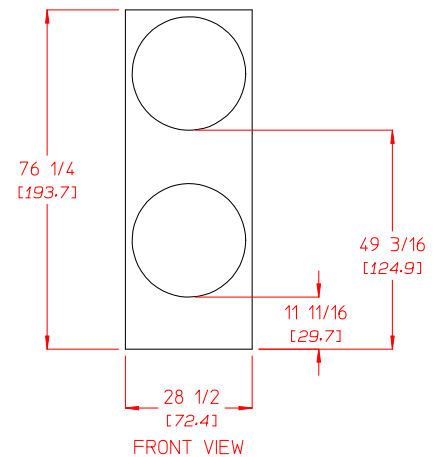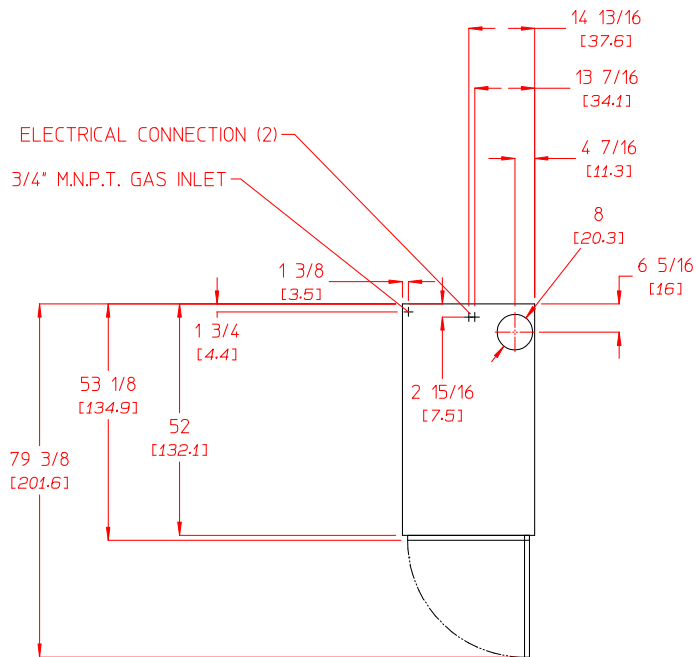

88 Currant Road • Fall River, MA 02720
Tel. 508-678-9000 • Fax 508-678-9447
sales@amdry.com • www.amdry.com